



(4) TAPPED HOLES
5/8-11 +.015" OVERSIZE
.63 [16] FULL THREAD
ON 5.00 [127] BOLT CIRCLE

315288-70+L
Standard Strength

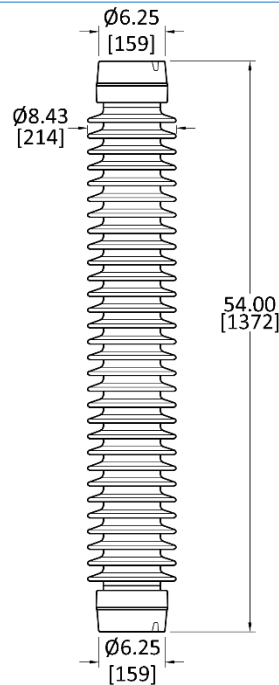

(4) TAPPED HOLES
5/8-11 +.015" OVERSIZE
.63 [16] FULL THREAD
ON 5.00 [127] BOLT CIRCLE

315289-70+L
High Strength

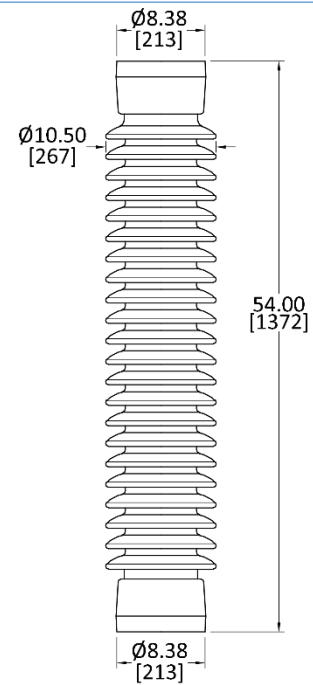

(4) TAPPED HOLES
3/4-10 +.015" OVERSIZE
.88 [22] FULL THREAD
ON 7.00 [178] BOLT CIRCLE

314857-70
Extra High Strength

Characteristics

Catalog Number (Light Gray-ANSI 70)	315288-70+L	315289-70+L	314857-70
Catalog Number (Brown)	315288+L	315289+L	314857
Catalog Number (RG®)	535288A+L	535289A+L	500202A
ANSI Technical Reference Number	T.R. 288	T.R. 289	---
Dimensions			
Leakage Distance, Reference Standard, in. [mm]	116 [2946]	116 [2946]	116 [2946]
Leakage Distance, High Leak, in. [mm]	185 [4699]	187 [4750]	177 [4496]
Leakage Distance, Extra High Leak, inches [mm]	202 [5131]	202 [5131]	190 [4826]
Mechanical Values			
Cantilever Strength, lbs. [kN]	1450 [6.45]	2200 [9.8]	4100 [18.2]
Tensile Strength, lbs. [kN]	20000 [89.0]	25000 [111.2]	40000 [177.9]
Torsion Strength, in-lbs. [kNm]	60000 [6.77]	90000 [10.16]	120000 [13.55]
Compression Strength, lbs. [kN]	60000 [266.9]	75000 [333.6]	120000 [533.8]
Electrical Values			
Impulse Flashover, Positive, kV	710	710	710
Low Frequency Withstand, 10 Sec. Wet, kV	275	275	275
Impulse Withstand, kV	650	650	650
Radio Influence Voltage Data			
Test Voltage, Rms to Ground, kV	88	88	88
Maximum RIV, Microvolts at 1000 kHz	200	200	200
Net Weight, Each, lbs. [kg]	133.8 [60.7]	180.4 [81.8]	291.5 [132.2]